


Assembled IP66, UL Type 4X 60mm

Metal
Limit switches

Movement to be detected

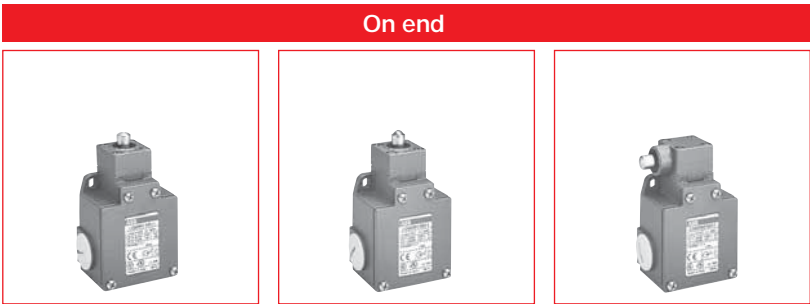

Operating head type

	Stainless steel plain plunger	Stainless steel ball plunger	Stainless steel lateral plain plunger
Conformity / \ominus (N.C. contact with positive opening operation)			
Maximum actuation speed	m/s 0.5	0.5	0.5
Min. force: - actuation	N 22	22	30
- positive opening operation	N 66	66	70

Contacts	Catalog number	LS65M11B11	LS65M12B11	LS65M21B11
Snap action contacts	List price	\$ 40	\$ 42	\$ 42
	Operation diagram			
Non-overlapping Slow action contacts	Catalog number	LS65M11D11	LS65M12D11	LS65M21D11
List price		43	45	45
	Operation diagram			
Overlapping Slow action contacts	Catalog number	LS65M11C11	LS65M12C11	LS65M21C11
List price		44	47	47
	Operation diagram			
Slow action contacts	Catalog number	LS65M11L02	LS65M12L02	LS65M21L02
List price		44	47	47
	Operation diagram			
Slow action contacts	Catalog number	LS65M11L20	LS65M12L20	LS65M21L20
List price		44	47	47
	Operation diagram			
Snap action contacts	Catalog number	LS65M11B02	LS65M12B02	LS65M21B02
List price		44	47	47
	Operation diagram			
Weight (packing per unit)	kg	0.265	0.265	0.280

Dimensions (mm)

