


Assembled 30mm, IP 65, UL Type 4

Movement to be detected

30° Cam translation movement

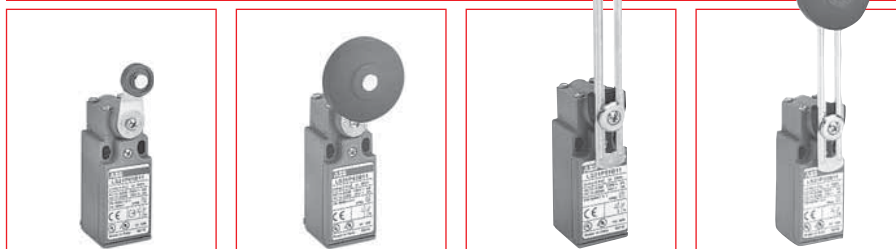

Operating head type

	Ø 18 Polyamide roller lever	Ø 45 Rubber roller lever	Adjustable Ø 18 polyamide roller lever	Adjustable Ø 45 rubber roller lever
Conformity / (N.C. contact with positive opening operation)	EN 50 047			
Maximum actuation speed	m/s 1.5	1.5	1.5	1.5
Min. torque: - actuation	N.m 0.10	0.10	0.10	0.10
- positive opening operation	N.m 0.32	—	—	—

9 Additional technical data

	Catalog number	LS35P41B11	LS35P42B11	LS35P51B11	LS35P52B11
Snap action contacts	List price	\$ 26	\$ 27	\$ 27	\$ 28
	Operation diagram				
Non-overlapping slow action contacts	Catalog number	LS35P41D11	LS35P42D11	LS35P51D11	LS35P52D11
	List price	27	29	28	30
	Operation diagram				
Overlapping slow action contacts	Catalog number	LS35P41C11	LS35P42C11	LS35P51C11	LS35P52C11
	List price	28	30	29	30
	Operation diagram				
Slow action contacts	Catalog number	LS35P41L02	LS35P42L02	LS35P51L02	LS35P52L02
	List price	28	30	29	30
	Operation diagram				
Slow action contacts	Catalog number	LS35P41L20	LS35P42L20	LS35P51L20	LS35P52L20
	List price	28	30	29	30
	Operation diagram				
Snap action contacts	Catalog number	LS35P41B02	LS35P42B02	LS35P51B02	LS35P52B02
	List price	28	30	29	30
	Operation diagram				
Weight (packing per unit)	kg	0.090	0.120	0.100	0.130

Dimensions (mm)

