


Accessories Ferrules


Terminal
blocks

Insulated

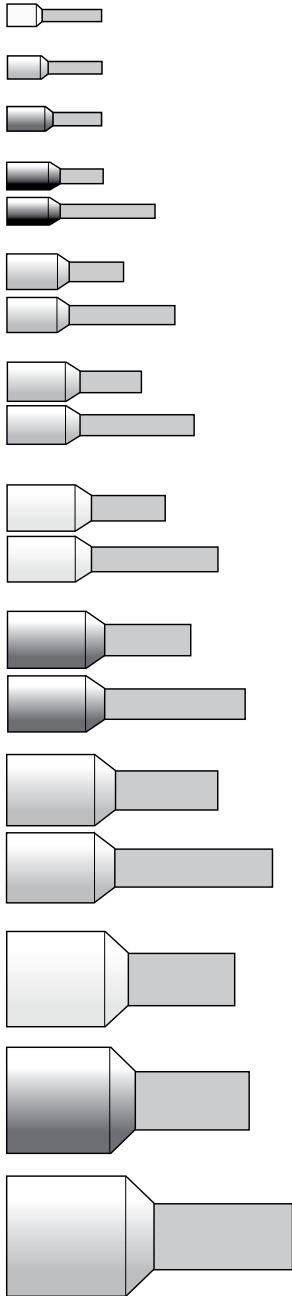

Wire size		Type	Color	Minimum order quantity	Dimensions (mm) ①								Catalog number
mm ²	AWG				L1	L2	d1	S1	d2	S2	D1	D2	
0.5	22	short	white	1,000	14.0	8.0	1.0	0.15	2.6	0.25	1.3	3.1	0304 454 00
0.75	20	short	grey	1,000	14.0	8.0	1.2	0.15	2.8	0.25	1.5	3.3	0304 455 01
1	18	short	red	1,000	14.0	8.0	1.4	0.15	3.0	0.25	1.7	3.5	0304 456 02
1.5	16	short	black	1,000	14.0	8.0	1.7	0.15	3.5	0.25	2.0	4.0	0304 457 03
1.5	16	long	black	1,000	24.0	18.0	1.7	0.15	3.5	0.25	2.0	4.0	0304 458 14
2.5	14	short	blue	1,000	14.0	8.0	2.2	0.15	4.2	0.25	2.5	4.7	0304 459 15
2.5	14	long	blue	1,000	24.0	18.0	2.2	0.15	4.2	0.25	2.5	4.7	0304 460 12
4	12	short	grey	1,000	17.0	10.0	2.8	0.20	4.8	0.30	3.2	5.4	0304 461 07
4	12	long	grey	1,000	26.0	18.0	2.8	0.20	4.8	0.30	3.2	5.4	0304 462 00
6	10	short	yellow	100	20.0	12.0	3.5	0.20	6.3	0.30	3.7	6.9	0304 463 01
6	10	long	yellow	100	26.0	18.0	3.5	0.20	6.3	0.30	3.7	6.9	0304 464 02
10	8	short	red	100	22.0	12.0	4.5	0.20	7.6	0.40	4.9	8.4	0304 465 03
10	8	long	red	100	28.0	18.0	4.5	0.20	7.6	0.40	4.9	8.4	0304 466 04
16	6	short	blue	100	24.0	12.0	5.8	0.20	8.8	0.40	6.2	9.6	0304 467 05
16	6	long	blue	100	28.0	18.0	5.8	0.20	8.8	0.40	6.2	9.6	0304 468 16
25	4	short	yellow	100	30.0	18.0	7.3	0.20	11.2	0.40	7.7	12.0	0304 469 17
35	2	short	red	50	30.0	18.0	8.3	0.20	12.7	0.40	8.7	13.5	0304 470 14
50	0	short	blue	50	40.0	25.0	10.3	0.30	15.0	0.50	10.9	16.0	0304 471 01

10



① Dimensions may vary slightly from one shipment to the next. See page 10.41 for ferrule crimping tools.